

Seismic Behaviour of 17th Century Khusro Tomb due to Site-Specific Ground Motion

Arjun Prasad¹, Kumar Pallav^{1, 2, *}, Deepak K. Singh¹

¹ Civil Engineering Department, MNNIT Allahabad, Allahabad, U.P, India

² Civil Engineering and Surveying Department, CPUT Bellville Campus, CapeTown, South Africa

1. INTRODUCTION

India is a country of rich diversified culture having heritage buildings like temples, churches, the tomb, forts and palaces. It encompasses some of the world most famous buildings viz., *The TajMahal, Ancient Churches of Goa, Qutab Minar, Red Fort and The Palaces of Udaipur and Jaipur*. The *Khusro Tomb*, as shown in Fig. (1), is one of the most important archaeological structures of the Prayag City (Previously Allahabad city, Uttar Pradesh, India) constructed by Sultan Nisar Begum (Sister of Amir Khusro), in the memory of Amir Khusro the eldest son of Jahangir and Shah Begum, in the year 1622 A.D [1,2]. It is a two-storied building with an arcaded wall, surmounted by a large hemispherical dome on an octagonal drum and the small *chhatris* (a round shape similar to umbrella) on all the corners of the Tomb. The interior of the tomb consists of a single room, whose walls are painted with a design of *floral patterns* and the dome is a medallion with the *star and geometric patterns*, is an utmost example of the *Mughal Architecture*. The Heritage/monumental buildings are necessary to be preserved in order to protect our cultural and social values for future generations and they are the assets for the Nation. In India, Archaeological Survey of India (ASI), Department of Culture, Ministry of Tourism and Culture, is responsible for the archaeological researches and safeguard of the cultural heritage. Hence, requires a detailed numerical model to understand the impact of various forces (static and dynamic loading) on the structure and to know about the critical area for rehabilitation purposes.

Many studies are available on analysis of the historical masonry buildings, including experimental works [3-5], non-linear static (pushover and kinematic limit analysis) and full non-linear dynamic analysis [6] and studies on design choices and selection of most appropriate materials and methods for strengthening [7]. The seismic vulnerability of the old masonry by considering the influence of non-linearity in material property using a finite element model in which the non-linearity of the masonry is considered [8-19]. In all these studies, a proper guideline is given to analyse Old monumental structures. But none of these had reported the behaviour of the monument for a site-specific simulated ground motion.



Fig. (1)
Location of Khusrobagh Tomb built in A.D. 1622 by Sultan Nisar Begum (Location Map: Google Map).

In the present work, Finite Element Analysis (FEA) is used to analyse the static and dynamic structural behaviour of Khusro Tomb. Accurate solid models are fundamental in this type of analysis and hence a 3-D model of the Khusro Tomb is made only after the detail survey and measurement of the entire monument. Mean and 30% reduce material properties is used to understand the behaviour of the structure. The standard gravity load and modal analysis is performed on the 3D- model. The Site-specific ground motion is estimated using a regional

seismological parameter in order to simulate ground motion at Allahabad, due to the Allahabad fault present at a distance 70 km, using the stochastic finite fault model based on Boore [20, 21], Motazedian and Atkinson [22] approach. In the present approach, instead of using the different earthquake time history for the region having scarce data or no data of earthquake records, one can opt this method for analysing any other structure by simulated site-specific ground motion. The study shows the stress variation, displacement and acceleration response of the Monument and may help the engineers and planners to know the effect on the monument due to nearby faults and helping them to locate the critical point for its proper maintenance and retrofitting work.

2. EARTHQUAKE SCENARIO AROUND ALLAHABAD

The ground shaking of the Himalayan region and peninsular India is due to the incessant subduction of Indian plate beneath the Eurasian plate. The subduction results in the accumulation of sub-surface stresses that releases the energy from time to time [23]. Shukla [24] and Singh [25] disclose the presence of many potential seismic sources that make the regional tectonic quite complex. They also stated that the Indo- Gangatic Plain (IGP) has experienced a large number of earthquakes in past 100 years, Prayag City lies in IGP, and there is great prospect of a major earthquake in the near future. Prayag (Allahabad) has felt shakes of many past earthquakes that occurred in Uttar Pradesh e.g., Rae-Bareilly, (1925, M_w 6.0), Bulandshahar (1956, M_w 6.2), Gorakhpur (1965, M_w 5.7) and Moradabad (1966, M_w 5.8) earthquakes; countrywide e.g., Dharchulla (1916 M_w 7.5), Uttarakhand (1945, M_w 6.5), Uttarkashi (1991, M_w 6.8) and Jabalpur (1997, M_w 6.0) and earthquakes like Nepal-Bihar (1934, M_w 8.4), 25th April Nepal (2015, M_w 7.8) and May Nepal (2015, M_w 7.3) from the adjoining region. The source like Main Central Thrust (MCT) and Main Boundary Thrust (MBT) that are very close to Prayag city and are one of the highly earthquake active regions in the world. Almost, it is observed from thirty decades that Faizabad Ridge (~70km from Prayag (Allahabad City)) is inactive and it is in high stressed due to a large seismic gap and can, therefore, cause a high magnitude earthquake in the near future [26]. Hence in the absence of recorded ground motion, synthetic earthquake has been simulated and discussed in the subsequent section. Therefore, because of the possible seismic gaps and tectonic setup around the region, it is important to understand the seismic response of the monuments like Khusro tomb.

3. ABOUT KHUSRO TOMB AND MODELLING

The Allahabad city shows the imprints of external appearance in the forms of its monuments viz., administrative, residential, educational, and devotional, which were built over a long span of time of the Mughals, the colonial, down to the contemporary. The monuments show the signature of varying practices of the construction and architecture of the different era. The information related to Mughal architecture is very trivial for the Allahabad city. Similarly, during the colonial period, the city prolonged under British rulers and their Indian subordinates then, embellish the city with mansions, monuments or building that reflect the power, glory and pride of the city. During those days many *saints* and *fakirs* lived in the city, due to which it is also known as *Fakirabad*. Apart from its miserable poverty, the city did have a magnificent fort on the bank of river Yamuna, the tombs at Khusrobagh, a garden and a sarai laid by the king Jahangir who ruled and lived in Allahabad from 1599 A.D. to 1609 A.D. In the construction of the buildings, the European traces on the settlements and monuments of Allahabad were observed and the Khusro tomb had the imprints of Europeans architecture. The place is mentioned both as a *bagh* and a *sarai* (originated from the Persian word, means garden). Till 1858 A.D., there was no doubt about its character as the Mughal *caravanserai* [27]. It is described as follows:




Fig. (2)
Plan of Khusrobagh Tomb (17.40 m x 17.40 m).




Fig. (3)
Model of Khusrobagh Tomb (Elevation) with dimensions of different level.



Fig. (4)
Finite element meshing of Khusrobagh Tomb with 71839 of SOLID 187 elements and 8615 of SURF154 elements.

Among the finest structures of Allahabad is called a sarai of Khusro, the illfated son of Jahangir. It is a fine quadrangle surrounded by an embattled wall along the inside of which are a series of lodges for gratuitous reception of travellers. Adjoining is a garden of pleasure ground, some fine mango trees and three mausoleums in a rich, magnificent yet solemn style of architecture. The grandeur of these tombs is once again praised in 1908 when they are described as “plain but massive” and that the “interiors of the principal mausoleum is adorned with painted flowers and birds”. The Khusrobagh was obviously the site of a Mughal garden combined with the caravanserai apart from the three original tombs with one more added later, raised respectively for Khusro, his mother and sister with the fourth one for Tambolan Bee (Tambolan standing for Istanbul in Turkey). It may thus be summed up that European response to the pre-existing architectural monuments, but their greatest admiration was for the Khusro Bagh [27, 28].

3.1. Building Details

Khusro Tomb is a complex historical structure made up of masonry. Masonry is considered as non-linear elastic material with negligible tensile strength. The behaviour of masonry structures can be reproduced using finite element models with the material properties notwithstanding tension. Figs. (2 and 3) shows four levels of the Khusro Tomb, the first level, second level, third level and top dome with a height of 5.0, 8.4, 10.4 and 15.3 m respectively. On each face, there are five openings of an arch shape. The first one has a central door opens in the room having a square dimension of 8.2m×8.2m is the central room. The other four openings, two are closed with the masonry infills and remaining two are closed with the perforated walls. A numerical model of the structure has been prepared on ANSYS Workbench 14.0 based on the measurement of plan and elevation of

the structure during the reconnaissance survey. A simplified square and the rectangular section for the columns and a parabolic shape for the arched openings are assumed for the modelling. The spline tool is used in the modelling of the top dome that is assumed to be a hollow sphere. This approximation is done to remove the complexity of modelling and analysis. The Tomb is symmetrical about the *xy-plane* and *yz-plane* and all the four corners are having four pillars infill forming a square shape hollow section as indicated in Fig. (2). The individual pillars have a square dimension of 1.4m × 1.4m with a clear spacing of 1.8m between the two pillars. These pillars form massive hollow pillars of 4.6m × 4.6m and extended up to the height of 8.4m (second floor). Altogether 16 numbers of corner pillars (group of 04 pillars) build a strong load transfer mechanism. Further, there is an internal central portion having two rectangular pillars of size 1.4m x 4.6m. Altogether 8 numbers of such pillars are provided. The central room is having a size of 8.2m × 8.2m. Therefore, between open spaces of the corner pillars, there is a central open space of 1.8m.

As discussed earlier that the tomb is symmetrical about two planes, *i.e.*, only one-fourth of the structure has to be drawn and replicated to complete the whole structure. Fig. (4) shows the FE meshing details of the Khusro tomb having a total 71839 numbers of solid elements and 8615 surface elements. Altogether 1774 contact elements are used in the model. The model contains two types of elements SOLID187 (10-noded tetrahedral structural solid element) and SURF154 (4 or 8-noded quadrilateral structural surface element). Both the elements have three degrees of freedom at each node. SOLID187 is also capable to solve deformation of nearly incompressible elasto-plastic material and fully incompressible hyper-elastic material. SURF154 is also capable to solve various load and surface applications.

3.2. Element Description

Brick masonry is modelled using SOLID187 element. A three-dimensional 10 noded tetrahedral element has 3 degrees of freedom at each node (translation in x, y, and z directions). The element has mixed formulation capability for simulation of linearly incompressible elastoplastic materials. The shape functions of the elements are as follows:

$$N_1 = \xi_1(2\xi_1 - 1), N_2 = \xi_2(2\xi_2 - 1), N_3 = \xi_3(2\xi_3 - 1), N_4 = \xi_4(2\xi_4 - 1) \\ N_5 = \xi_1\xi_2, N_6 = \xi_2\xi_3, N_7 = \xi_1\xi_3, N_8 = \xi_1\xi_4, N_9 = \xi_2\xi_4, N_{10} = \xi_3\xi_4$$

Displacement is obtained using equations 1.

$$u = \sum_{i=1}^{10} N_i u_i, v = \sum_{i=1}^{10} N_i v_i, w = \sum_{i=1}^{10} N_i w_i \quad (1)$$

where $N_1, N_2, N_3, \dots, N_{10}$ are shape functions and $u_1, u_2, u_3, \dots, u_{10}, v_1, v_2, v_3, \dots, v_{10}$, and $w_1, w_2, w_3, \dots, w_{10}$ are displacement at corresponding nodes. Further, the strain is estimated using the strain-displacement relationship.

$$\{\epsilon\}_{6 \times 1} = [B]_{6 \times 30} \{\bar{x}\}_{30 \times 1} \quad (2)$$

where $\{\epsilon\}_{6 \times 1}$ is strain vector

$$\{\epsilon\}_{6 \times 1} = [\epsilon_{xx} \ \epsilon_{yy} \ \epsilon_{zz} \ \epsilon_{xy} \ \epsilon_{yz} \ \epsilon_{zx}]^t$$

And $\{\bar{x}\}_{30 \times 1}$ is displacement at each node

$$\{\bar{\chi}\}_{30 \times 1} = \sum_{r=1}^{10} [u_r \quad v_r \quad w_r]^t$$

$$[D]_{6 \times 30} = \sum_{r=1}^{10} \begin{bmatrix} \frac{\partial N_r}{\partial x} & 0 & 0 \\ 0 & \frac{\partial N_r}{\partial y} & 0 \\ 0 & 0 & \frac{\partial N_r}{\partial z} \\ \frac{\partial N_r}{\partial y} & \frac{\partial N_r}{\partial x} & 0 \\ 0 & \frac{\partial N_r}{\partial z} & \frac{\partial N_r}{\partial y} \\ \frac{\partial N_r}{\partial z} & 0 & \frac{\partial N_r}{\partial x} \end{bmatrix}_{6 \times 30}$$

From obtained values of strain, stress is estimated using stress strain relationship.

$$\{\sigma\}_{6 \times 1} = [D]_{6 \times 6} \{\epsilon\}_{6 \times 1} \quad (3)$$

Where D is the rigidity matrix

$$[D] = \frac{E}{(1+\nu)(1-2\nu)} \begin{bmatrix} (1-\nu) & \nu & \nu & 0 & 0 & 0 \\ \nu & (1-\nu) & \nu & 0 & 0 & 0 \\ \nu & \nu & (1-\nu) & 0 & 0 & 0 \\ 0 & 0 & 0 & (0.5-\nu) & 0 & 0 \\ 0 & 0 & 0 & 0 & (0.5-\nu) & 0 \\ 0 & 0 & 0 & 0 & 0 & (0.5-\nu) \end{bmatrix}$$

and $\{\sigma\}_{6 \times 1}$ is stress vector

$$\{\sigma\}_{6 \times 1} = [\sigma_{xx} \quad \sigma_{yy} \quad \sigma_{zz} \quad \sigma_{xy} \quad \sigma_{yz} \quad \sigma_{zx}]^t$$

4. MATERIALS AND METHODS

4.1. Properties of Material

After extensive literature review, a book on repair performed on different monuments during 1954-55 describes the work. A small paragraph on repair work of the Khusrobagh Tomb is shown from the book, *Indian Archaeology 1954-55, A review* which was edited by A. Ghosh [28].

“The tomb of Bibi Tambolan, some important work was carried out, such as the provision of dasa stones with a foundation of lakhauri brick in lime over a lime-concrete bed all-round the platform of the tomb and the replacement by new ones of broken, missing and decayed stones in its stone pavement. The wide joints and cracks in the main arch, the spandrel and the facade on the south side of the southern gateway were grouted, while ordinary joints were treated with recessed lime-pointing. The southern facade together with the bastions of the gate, was re-plastered after the removal of old and decayed plaster. The broken stone lotus over the south east turret of the gate was repaired”.

The paragraph provides some hint of the material used in the Khusrobagh tomb. The Finite element analysis of historical structures largely depends on the accurate estimation of material properties and its utilization in numerical models. Mechanical properties of stones and bricks were investigated by Nuno and Lourence [9] for Gaioleiro buildings in Lisbon, Portugal whereas Michele and Vignoli [10, 11] carried out studies on Romanesque Masonry and Basilica of Sanat Maria. It was difficult to find the engineering properties of the Khusro Tomb due to prohibited access for testing of the material of the structure. Hence, the average value of the material tested assumed by other researcher can be considered the representative of the behaviour of the materials used in Khusro Tomb. Table 1 shows the properties of material assumed for the present study based on the literature survey of the monuments of the same era.

Material	Modulus of Elasticity (E)	Poisson's Ratio (ν)	Compressive Strength (f _c)	Tensile Strength (f _t)	Shear Strength (f _v)	Unit Weight (γ)
Concrete	25000	0.2	25	3	10	24
Brick	15000	0.2	15	2	8	19
Stone	10000	0.2	10	1.5	6	17
Plaster	1000	0.2	1	0.2	0.5	16
Mortar	500	0.2	0.5	0.1	0.2	16
Soil	100	0.2	0.1	0.05	0.1	18



Table1

Material properties used by researchers for masonry type structure.

1

4.2. Finite Element Analysis

The series of differential equation bounded by certain boundary conditions usually solve the complex structural engineering problem. These differential equations are generally complex and difficult to solve using classical analytical methods over a required time domain. The finite element method is an approximate numerical technique to solve such equations. The convergence study is carried out on the whole modelled structure to find out the optimum mesh and can be performed on any of the solution variables. In the present study, the first mode of fundamental natural frequency is chosen. A plot between the frequency and mesh size is drawn and shown in Fig. (5). It is observed that the results are coming close when the mesh size is 300 mm, and the converged value of frequency is 21.62 Hz. So, the mesh size of 300 mm has been chosen for the analysis of the structure.

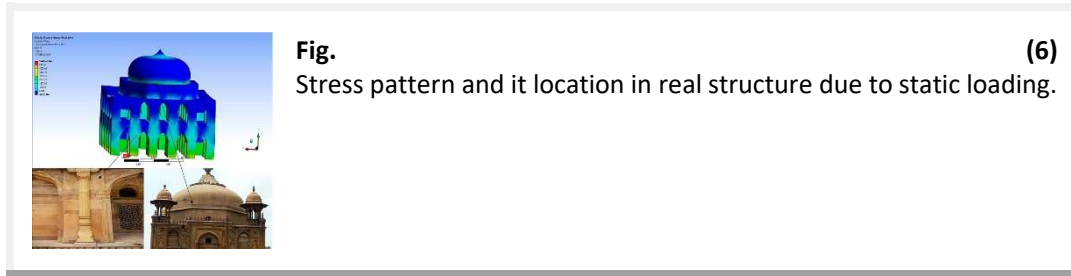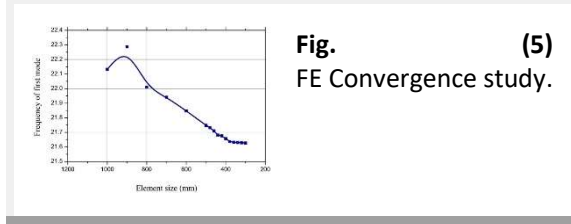

$$\sigma_{von\ mises} = \sqrt{\frac{1}{2}[(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_3 - \sigma_1)^2 + 3(\tau_{xy}^2 + \tau_{yz}^2 + \tau_{zx}^2)]} \quad (4)$$

Further, a linearly elastic and dynamic analysis of the structural model is carried out which would be helpful to draw important information about the behaviour, interaction and performance of the structure. To obtain the solution of the model, discretization of the model into finite elements was done to solve them individually. Further, they all are merged by applying boundary conditions. The obtained results are interpreted to get other valuable information about the performance and response of the structure.

4.3. Static Analysis

In order to the behaviour of the Khusro Tomb due to its geometry, the linear static analysis was performed in ANSYS Workbench using vertical loads corresponding to self weight and live load. The analysis has been performed under constant vertical load *i.e.* self weight due to standard earth gravity as per IS: 875(Part 1)-1987. The live load of 0.75 kN/m² (crew load) is applied at first floor level, second floor level and dome as per Indian standard IS: 875 (part 2)-1987. The linear elastic material behaviour is considered for the analysis. Static analysis is performed by providing fixed support at the base and resultant stresses are obtained in terms of equivalent von Mises stress.

The maximum value of compressive stress of 0.547 MPa is generated at the base and bottom of dome of the structure. The maximum value of displacement 0.14 mm is obtained at the top of dome in vertical downward direction. The small value compressive stress of 0.12 MPa is obtained at the interior of the columns and second floor level of the structure. It shows that the symmetrical geometrical plan of structure distributes the load uniformly in the structure and (Fig. 6) demonstrates the variation of stress on the monument in the form of contour. The distribution of stress is uniform through out the Tomb due to symmetry in the plan. The maximum and minimum stress is in the order of $\sim 10^{-1}$ N/mm² and $\sim 10^{-2}$ N/mm².

4.4. Modal Analysis

To understand the dynamic response of the structure, modal analysis is performed. Mode shape of the structure is obtained by solving dynamic equilibrium equation

$$[M]\{\ddot{x}\} + [C]\{\dot{x}\} + [K]\{x\} = \{f(t)\} \quad (5)$$

For free vibration analysis force vector $f(t) = 0$ and equation (5) can be simplified as

$$[K]\{x_i\} = \omega_i^2 [M]\{x_i\} \quad (6)$$

where $[K]$ (stiffness matrix) = $\int [B]^T [D] [B] du$; $\{x_i\}$ is mode shape vector, ω_i is the frequency of i^{th} mode, and $[M]$ (mass matrix) = $\int [N]^T [N] \rho du$

The first and second modes are translation in transverse and longitudinal directions with fundamental frequency of 21.678 Hz and 21.679 Hz respectively, shown in Figs. (7a and b). First two modes are almost the same due to its symmetry about both x-axis and y-axis with a maximum displacement of 1.0081mm and 1.0073mm respectively. The third mode is a torsional mode with a fundamental frequency of 25.377 Hz, shown in Fig. (7c). The rest of the higher mode shapes are the combination of translational and torsional mode (Figs. 7 d-f). The free vibration mode shapes shown in Fig. (7), helps to characterize the displacement pattern of the structure. Table 2 shows all the six modes frequency. The higher mode response is having high influences on the top level shear and least influence on the displacement of structure. Tables 3a-c shows the mass participation for the Khusro Tomb.

Table 1. Material properties used by researchers for masonry type structure.

Masonry type	Mass Density ρ (kg/m ³)	Young's Modulus E (GPa)	Poisson's Ratio ν
Castles buildings, Lisbon, Portugal [2]	2100	7.9	0.2
European masonry Church [2]	2300	2000	0.25
Buildings of Indo-Islamic architecture, India [2]	1900	1400	0.2
Bagh Qila [2]	2000	2100	0.2
Castles and forts walls	2000	2000	0.2

Table
Frequencies of various modes.

2

4.5. Site Specific Time History Analysis

Superposition method of ANSYS Workbench 14.0 is used to know the behavior of time history analysis. Gravity loading results is combined with the time history results with appropriate sign convention. In the absence of strong ground motion record for Allahabad city, synthetic ground motion is simulated using the stochastic method [20]. Motazedian and Atkinson [21] had modified the method and the target ground motion amplitude spectrum, which depends on magnitude, distance and duration properties, is given by

$$A_j(r, f) = \frac{R_{\theta\phi} \cdot F \cdot V}{4\pi\rho v_s^3} \cdot (2\pi f)^2 \cdot \frac{M_{0ij}}{\left[1 + \left(\frac{f}{f_{0ij}}\right)^2\right]} \cdot G \cdot e^{\frac{-\pi f r_{eff}}{v_s Q(f)}} e^{-\pi k f} \quad (7)$$

where target amplitude spectrum corresponding to distance (r) and frequency (f) is represented by $A_j(r, f)$, radiation pattern constant ($R_{\partial\phi}$, average value of 0.55 for shear waves), free surface coefficient ($\sqrt{2}$) generally taken as 2), partitioning coefficient of shear waves (V) into two components (generally taken as 1), density of rock at source (ρ), shear wave velocity at source (v_s), seismic moment related to the ij^{th} sub fault (M_{0ij} = corner frequency related to ij^{th} sub-fault at time t ($f_{0ij}(t)$), M/N number of ruptured sub-faults at time t ($N_r(t)$), average sub fault moment due to each fault ($M_{0,avg}$ = M/N), N total number of sub-faults, geometrical spreading function (G), effective distance of sub fault from the site (r_{eff}), quality factor at frequency f ($Q(f)$) and high frequency diminution filter, kappa (κ). The source duration is based on corner frequency and path duration, can be calculated by

$$T = \left(1/f_c\right) + 0.05r \quad (8)$$

The cut-off frequency relating to ij^{th} sub fault is given by Motazedian and Atkinson [21] by

$$f_{0ij}(t) = 4.9 * 10^6 (N_r(t))^{-3} \cdot v_s \cdot \left(\frac{\Delta\sigma}{M_{0,avg}}\right)^{1/3} \quad (9)$$

Where v_s is in km/s, $\Delta\sigma$ is in bars and $M_{0,avg}$ is in dyne-cm. The parameters are used from the work of Singh *et al* [29] and Mitra [30]. The Stress drop for Indo-Gangetic Plains (IGP) is taken between 50-200 bars [31]. To achieve high amplitude of Peak Spectral Acceleration (PSA), stress drop values 150 bars the simulation has been estimated. The quality factor $Q(f)$ for the IGP has been taken from the work of Mohanty *et al.* [32] as $142f^{1.04}$. The geometric spreading function (G) worked out for the Indian region by Singh *et al.* [25]. The kappa factor κ for deep sediment filled layers, like Allahabad city (sediment depth is more than 1000 m), a higher value of kappa can be used in the range of 0.02-0.08. In the present research Kappa value of 0.06 is used. Time history generated due to the Allahabad fault is scaled down to 0.1g, 0.3g and 0.6g in order to show the response of KhusroTomb (Fig. 8). The effective duration of ground motion is approximately 80 sec. (Fig. 9a) shows acceleration response of all the level of Khusro Tomb for simulated Peak Ground Acceleration (PGA) input of 0.1g. The response of each level de-amplified with respect to input ground motion. It is observed that first floor response is ~33 times lower than the input ground motion. Further, the response of other levels increases gradually with respect to first level. The decrease in response may be due to stiffness of the Khuro tomb and frequency content of the input ground motion. Similar pattern is observed for scaled input of 0.3g and 0.6g. The displacement response of Khusro tomb is shown in Fig. (10). Table 4 shows the response on all the levels. The maximum displacement is an order of $\sim 10^{-2}$ mm for all the level. Further, it is also observed that reducing the material properties by 30%, the acceleration response is increased by ~75% and displacement increased by ~60% compare to mean properties of the material. It is observed from (Table 4) that decrease in material properties significantly increases the response but the structure is in stable condition.

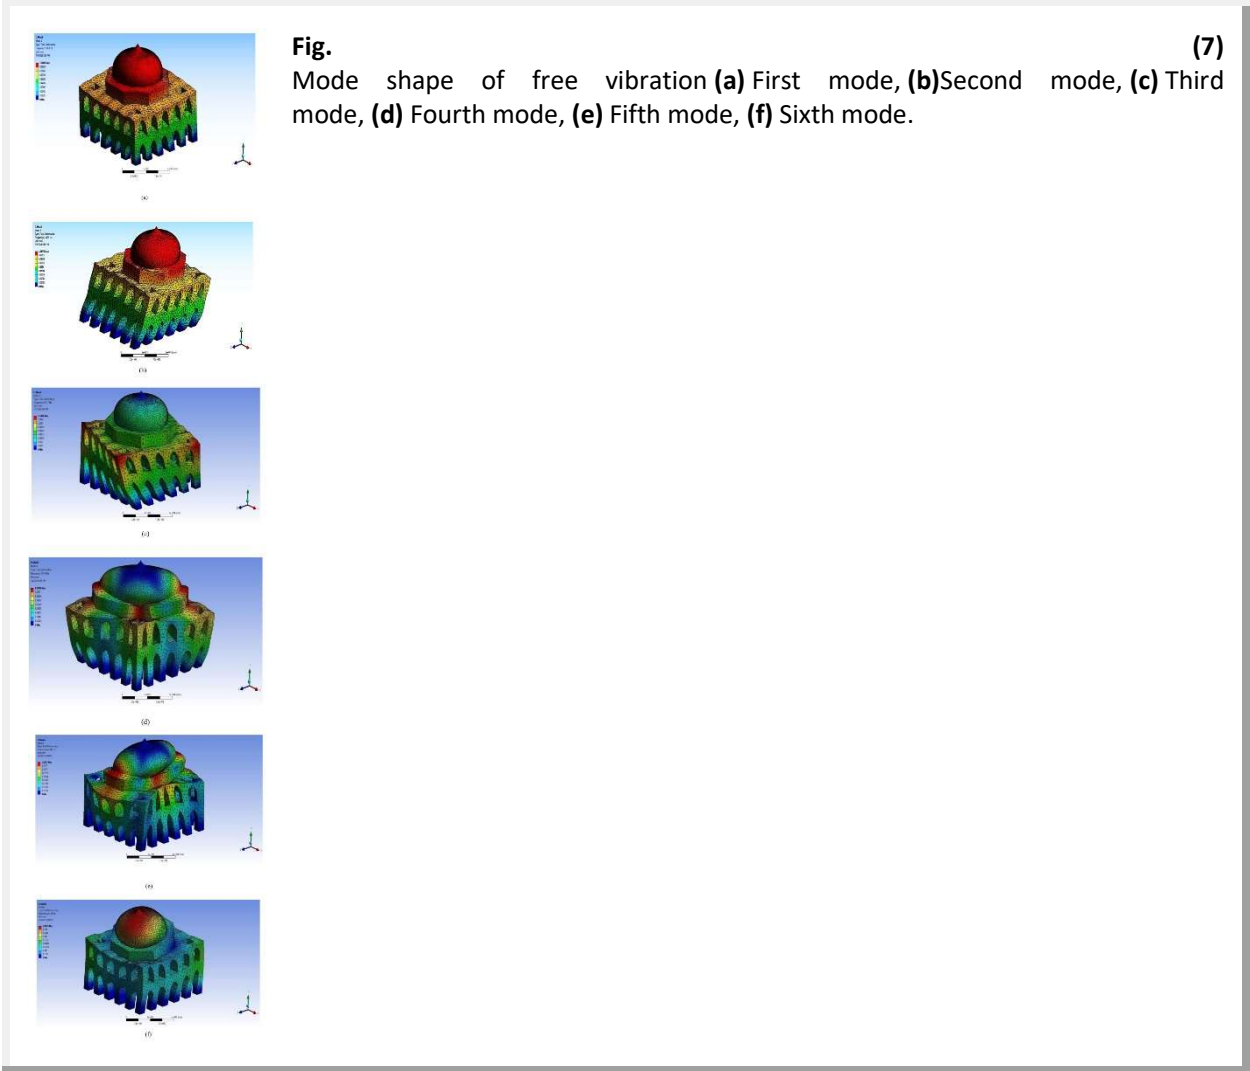


Table 3. Participation factor

No	Order	Part	Participation
1	1.24	0.001	0.001
2	1.24	0.001	0.001
3	1.00	0.001	0.001
4	1.00	0.001	0.001
5	1.00	0.001	0.001
6	1.00	0.001	0.001

Table
Participation factor in x-direction.

3(a)

Table 10. Participation factor in y-direction.

No	Layer	Iter	Participation
1	2.74	0.001	0.001
2	2.74	0.001	0.001
3	2.91	0.001	0.001
4	3.07	0.001	0.001
5	4.08	0.001	0.001
6	5.11	0.001	0.001

Table
Participation factor in y-direction.

3(b)

Table 10. Participation factor in z-direction.

No	Layer	Iter	Participation
1	2.74	0.001	0.001
2	2.74	0.001	0.001
3	2.91	0.001	0.001
4	3.07	0.001	0.001
5	4.08	0.001	0.001
6	5.11	0.001	0.001

Table
Participation factor in z-direction.

3(c)



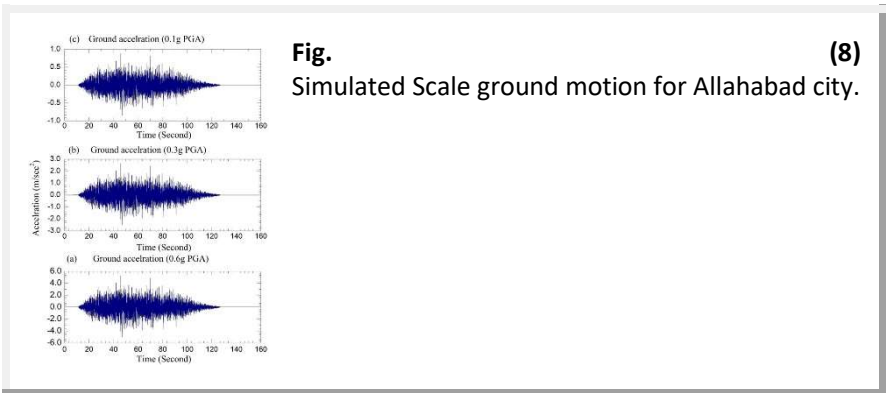


Table 10. Participation factor in z-direction.

No	Layer	Iter	Participation
1	2.74	0.001	0.001
2	2.74	0.001	0.001
3	2.91	0.001	0.001
4	3.07	0.001	0.001
5	4.08	0.001	0.001
6	5.11	0.001	0.001

Table
Deflection and acceleration with Mean and 30% Reduce properties.

4

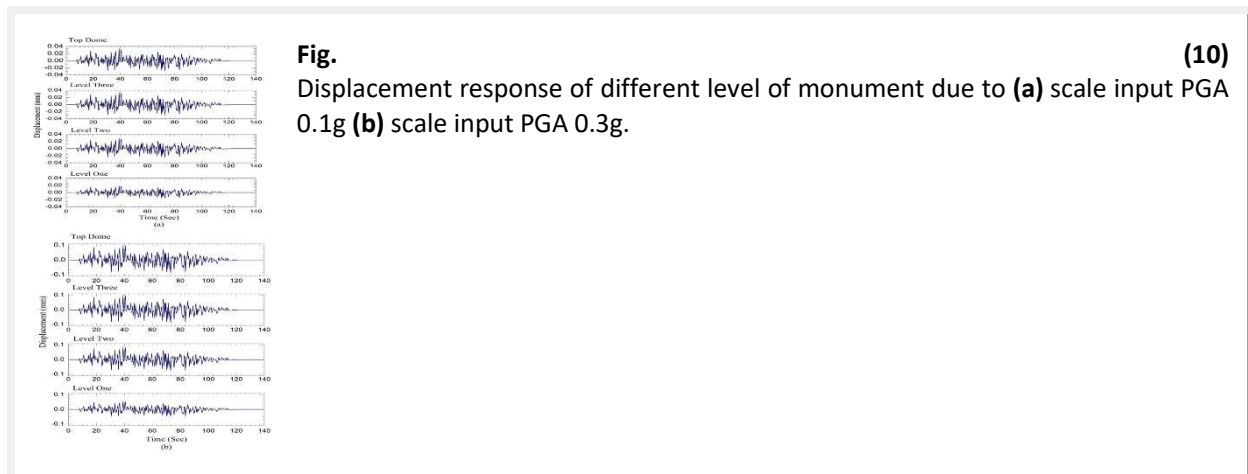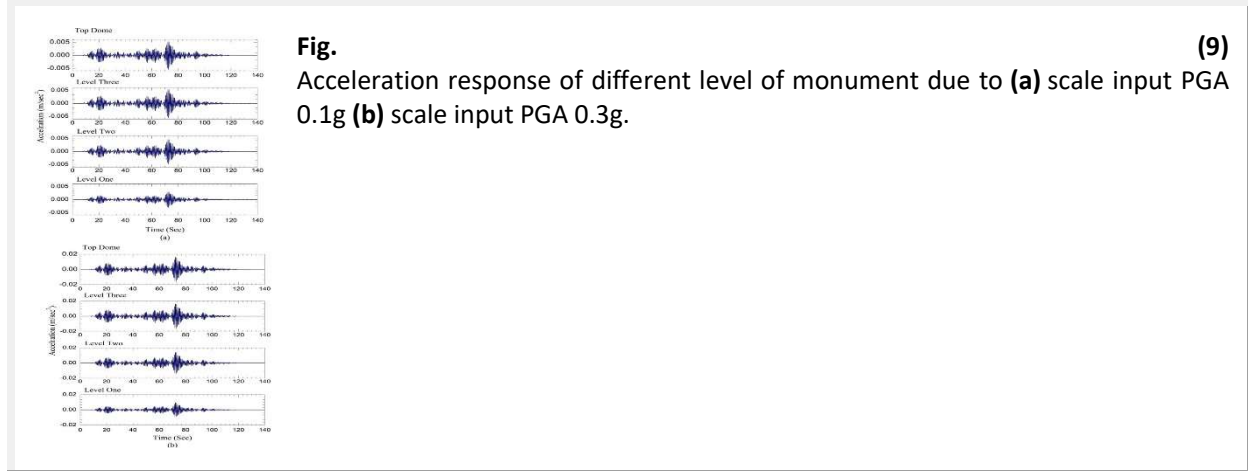

CONCLUSION

The Khusro Tomb is the beautiful extraordinary example of Mughal Architecture with a trace of European style stone masonry structure, was the splendid structure of 17th century. Based on limited resources, reveals substantial information about 500 years the old monumental Structure. After carrying out the extensive survey about the dimensions and giving careful consideration in the 3-D modelling of the Khusro Tomb, a Static and dynamic analyses are performed on the 3D model. The model can be preserved for future references. In the gravity load analysis, the dead load i.e. self-weight of the structure including the weight of the finishes and live load i.e. crew load, is taken as 0.75 kN/m² as per the codal provisions. The maximum stress is observed at the base and bottom of the dome of the structure. The small value compressive stress generated at the interior of the columns and second floor level of the structure. The maximum displacement of 0.14 mm is obtained at the top of dome in vertical downward direction. Dynamic analysis consists of modal and time history analysis to obtain the response of the structure, which provides information about the participated mass in a particular mode in respective directions. Site Specific time history results show that the structure is adequate to withstand the lateral force due to synthetically generated ground motion from the nearest Allahabad fault.

Further decrease in material properties has significantly increased the acceleration and displacement response of the monument and the monument is still passable to withstand the lateral force.

REFERENCES

- [1] A.A. Führer, "The monumental antiquities and inscriptions in the North-Western provinces and Oudh", *Allahabad Press: Government Press, Varanasi/New Delhi*, .
- [2] H.R. Nevill, "Allahabad: A Gazetteer, District Gazetteers of the United Provinces of Agra and Oudh", *District gazetteers of the United Provinces of Agra and Oudh*, vol. 23, Allahabad: Government Press, .
- [3] L. Binda, L. Zanzi, M. Lualdi, and P. Condoleo, "The use of georadar to assess damage to a masonry Bell Tower in Cremona, Italy", *NDT Int.*, vol. 38, pp. 171-179. [<http://dx.doi.org/10.1016/j.ndteint.2004.03.010>]
- [4] C. Modena, M.R. Valluzzi, R. Tongini Folli, and L. Binda, "Design choices and intervention techniques for repairing and strengthening of the Monza cathedral bell-tower", *Constr. Build. Mater.*, vol. 16, pp. 385-395. [[http://dx.doi.org/10.1016/S0950-0618\(02\)00041-7](http://dx.doi.org/10.1016/S0950-0618(02)00041-7)]
- [5] A. Anzania, L. Bindaa, A. Carpinterib, S. Invernizzib, and G. Lacidognab, "A multilevel approach for the damage assessment of Historic masonry towers", *J. Cult. Herit.*, vol. 11, pp. 459-470. [<http://dx.doi.org/10.1016/j.culher.2009.11.008>]
- [6] M. Acito, M. Bocciarelli, C. Chesi, and G. Milani, "Collapse of the clock tower in Finale Emilia after the May 2012 Emilia Romagna earthquake sequence: Numerical insight", *Eng. Struct.*, vol. 72, pp. 70-91. [<http://dx.doi.org/10.1016/j.engstruct.2014.04.026>]
- [7] P.B. Lourenco, "Assessment, diagnosis and strengthening of Outeiro Church, Portugal", *Constr. Build. Mater.*, vol. 19, pp. 634-645. [<http://dx.doi.org/10.1016/j.conbuildmat.2005.01.010>]
- [8] M. Betti, and L. Galano, "Seismic analysis of historic masonry buildings: The Vicarious Palace in Pescia (Italy)", *Buildings*, vol. 2, pp. 63-82. [<http://dx.doi.org/10.3390/buildings2020063>]
- [9] N. Bend, B. Paulo, and O. Lourenc., "Seismic assessment of masonry (Gaioleiro) buildings in Lisbon, Portugal", *J. Earthquake Eng.*, vol. 14, pp. 80-101.
- [10] M. Betti, and A. Vignoli, "Modelling and analysis of a Romanesque church under earthquake loading: Assessment of seismic resistance", *Eng. Struct.*, vol. 30, pp. 352-367. [<http://dx.doi.org/10.1016/j.engstruct.2007.03.027>]
- [11] M. Betti, and A. Vignoli, "Numerical assessment of the static and seismic behaviour of the Basilica of Santa Maria all'Impruneta (Italy)", *Constr. Build. Mater.*, vol. 25, pp. 4308-43024. [<http://dx.doi.org/10.1016/j.conbuildmat.2010.12.028>]
- [12] S. Burman, K. Pallav, and K. D. Singh, "Finite element modelling of 'Rang Ghar' monument, Assam", *IJIRSET*, vol. 3, pp. 144-151.
- [13] S. Ivorra, and F.J. Pallares, "Dynamic investigations on a masonry bell tower", *Eng. Struct.*, vol. 28, pp. 660-667. [<http://dx.doi.org/10.1016/j.engstruct.2005.09.019>]